falmec

VIRGOLA

Version
Built-in 60 cm - 600 m^3/h
Collection
Design
EAN code
8034122345253

The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)
Tempered turning glass
Electronic control
LED lighting
Metallic grease filter, removable and washable
Charcoal filter included

OPTIONAL ACCESSORIES

KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
KCVJN.01#3
Chimney h 120 cm
KCVJN.00#3
Telescopic chimney h 185 + h 185

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
60
Finishing
Scotch brite stainless steel (AISI 304)
Tempered turning glass
Motor
600 m^3/h
Type of control
Electronic control
Lighting
Led 2x1,2 W - 3200 K
Filter
Metallic filter "Base" - 245x207 mm - 2 pz
Charcoal filter
Square charcoal filter - Type 3 - included
Minimum distance
Gas hod: 52 cm
Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

Gross weight
13 kg
Net weight
10 kg
Volume
0,10 m^3
Packaging size
Length
655 mm
Height
425 mm
Depth
360 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
230 W
Current
220-240V
Frequency
50/60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
480 m^3/h
I.E.C. 61591
Maximum noise
65 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Maximum power motor
180 W
ENERGY CLASS
C

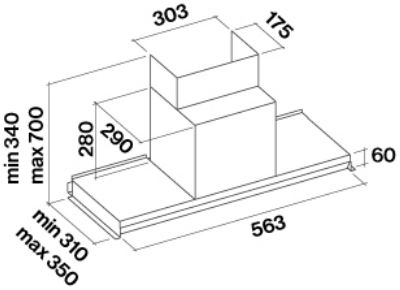



falmec

VIRGOLA

Version
Built-in 60 cm - 600 m^3/h
Collection
Design
EAN code
8034122345253

MOTOR
TECHNICAL SHEET

Speed motor	1	2	3
Noise dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	220	320	480
Maximum pressure (Pa)	270	400	500
Power motor (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

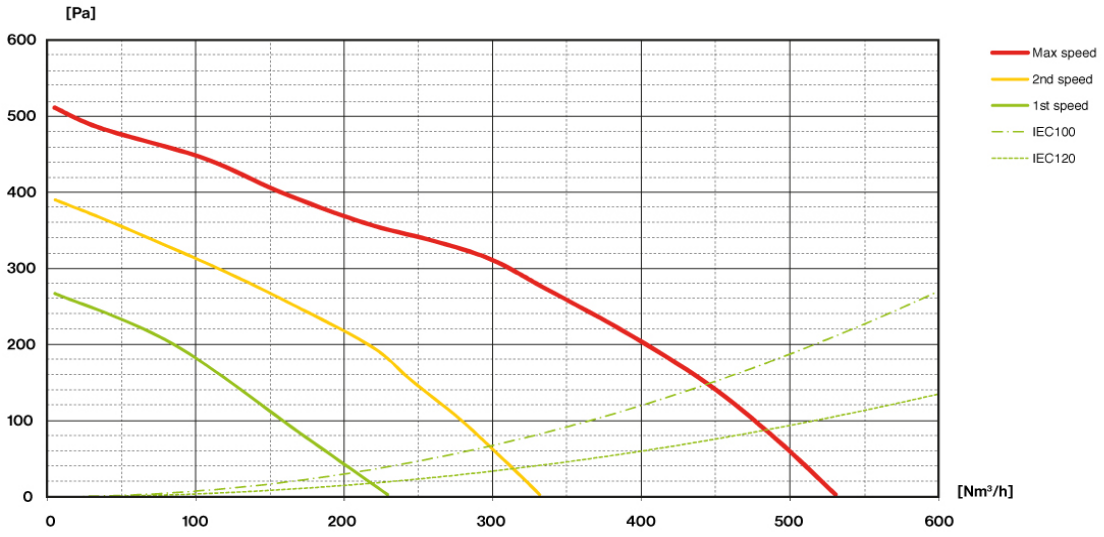

falmec

VIRGOLA

Version
Built-in 60 cm - 600 m^3/h
Collection
Design
EAN code
8034122345253

ENERGY LABEL

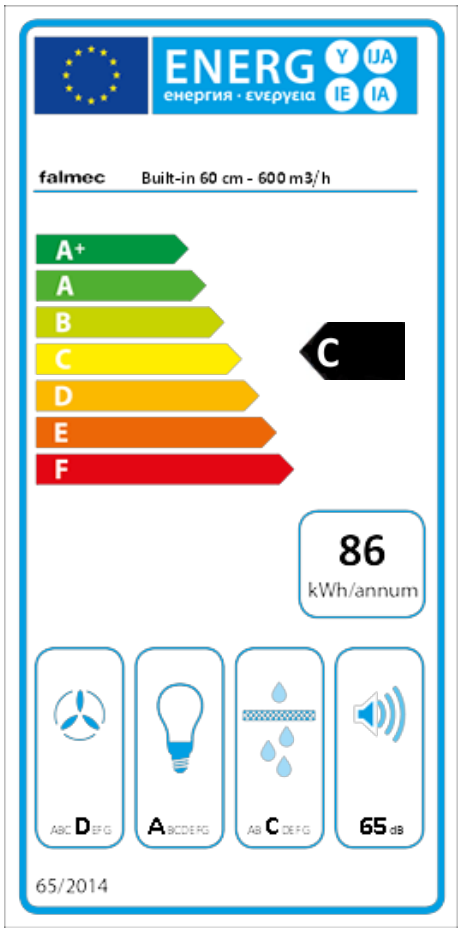

PF		
S	Falmec Spa	
M	Built-in 60 cm - 600 m^3/h	
AEC	85,9	kWh/a
ECC	C	
FDE	15,8	
FDEC	D	
LE	29,3	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m^3/h
Qmax	480,0	m^3/h
Qboost	480,0	m^3/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,95	W
PI		
F	1,4	
EEI	80,2	
Qbep	303,0	m^3/h
Pbep	308	Pa
Qboost	480,0	m^3/h
Wbep	164,0	W
WL	2,80	W
Emiddle	82	lex
Lwa-SPEmax	65	dBA

PF_Product fiche according to 65/2014 / S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency Qmin_Air flow (in m3/h) at min speed in normal use / QQmax_Air flow (in m3/h) at max speed in normal use / Qboost_Air flow (in m3/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A -weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A- weighted sound power emissions at max speed in normal use / SSPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps) / **PI_Additional information according to 66/2014** / F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point maximun air flow / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.